

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

AB

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
8 March 2001 (08.03.2001)

PCT

(10) International Publication Number  
WO 01/17152 A1(51) International Patent Classification<sup>7</sup>: H04K 1/04

(21) International Application Number: PCT/BR99/00076

(22) International Filing Date:  
13 September 1999 (13.09.1999)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
PI 9903609-6 27 August 1999 (27.08.1999) BR(71) Applicant (for all designated States except US):  
COPPE/UF RJ - COORDENAÇÃO DOS PROGRAMAS DE PÓS GRADUAÇÃO DE ENGENHARIA DA UNIVERSIDADE FEDERAL DO RIO DE JANEIRO [BR/BR]: Centro de Tecnologia, S/Nº, Bloco G, Ilha do Fundão, CEP-20000-000 Rio de Janeiro, RJ (BR).

(72) Inventors: and

(75) Inventors/Applicants (for US only): CARDOSO SALOMÃO, Sérgio, Lulz [BR/BR]: Rua Torres Sobrinho, 56, B III apto, 204, Méier, CEP-20780-050 Rio de Janeiro.

RJ (BR). CASTRO ALVES, Vladimir [BR/BR]: Rua 09, Quadra 87, Lote 5A, casa 12, Cambinhoas, Niterói, CEP-24358-000 Rio de Janeiro, RJ (BR). MONTEIRO CHAVES, Filho, Eliseu [BR/BR]: Av. Mal. Henrique Lott, 270, apto 1104, Barra da Tijuca, CEP-22631-370 Rio de Janeiro, RJ (BR).


(74) Agents: JOUBERT GONCALVES DE CASTRO &amp; ZULDECH ASSESSORIA EMPRESARIAL LTDA; Av. Emami do Amaral Peixoto, 458 s1001, Centro Niterói, CEP-24020-077 Rio de Janeiro, RJ et al. (BR).

(81) Designated States (national): AL, AM, AT, AU, AZ, BA, BB, BG, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: A METHOD FOR THE HARDWARE IMPLEMENTATION OF THE IDEA CRYPTOGRAPHIC ALGORITHM - HIPCRYPTO

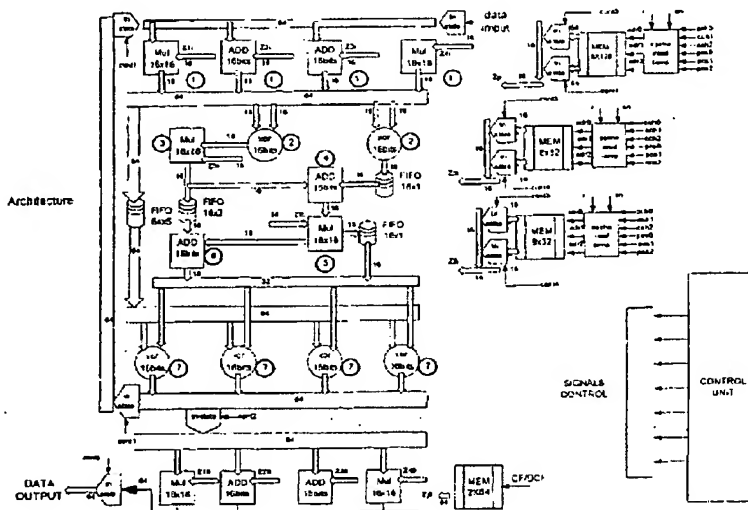

(57) Abstract: HiPCrypto is the hardware implementation of the most secure private key cryptographic algorithm: IDEA (International Data Encryption Algorithm), through the exploitation of spatial and temporal parallelism techniques in order to achieve the processing speed required by ATM and Gigabit networks.

WO 01/17152 A1

**WO 01/17152 A1**



**Published:**

— *With international search report.*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

WO 01/17152

PCT/BR99/00076

Description of the Invention "A METHOD FOR  
THE HARDWARE IMPLEMENTATION OF THE IDEA CRYPTOGRAPHIC  
ALGORITHM - HiPCrypto"

TECHNICAL FIELD

5           HiPCrypto is a hardware architecture proposal  
for the IDEA cryptographic algorithm, in which were used  
techniques for the exploitation of spatial and temporal  
parallelism, in order to reach the processing speeds  
required by real time applications and high speed data  
10 communication networks such as ATM.

Nowadays, a world tendency exists for the use  
of networks that provide different types of  
Telecommunication services such as the Integrated Service  
Data Network (ISDN). These types of networks should provide  
15 a wide range of services from telephone and cable TV to  
video conference.

The technological progress of transmission  
data networks pushed the development of cryptographic  
algorithm that became progressively more complex and  
20 robust. They are widely used by private and governmental  
organizations as well as individuals that need to ensure  
secrecy in data communication.

The increasing complexity of recent  
cryptographic algorithms require high processing  
25 capabilities due to the large number of arithmetic and  
logic operations that have to be executed, in some cases  
for real time applications like in video confereces.

PREVIOUS TECHNIQUES

Direct hardware implementation of  
30 cryptographic algorithms can ensure high processing speeds  
required by current and future applications in data

WO 01/17152

2

PCT/BR99/00076

transmission and eliminate a potential bottleneck in data communication networks that require high security levels.

Consequently, several cryptographic algorithms were totally or partially implemented as  
5 Application Specific Integrated Circuits.

Several hardware and software implementations have been developed in the past decade for the Data Encryption Standard (DES), the most popular private key cryptographic algorithm. Table 1 shows the performance  
10 obtained for some software implementations in different platforms. Table 2 shows the performance obtained for some dedicated hardware implementations. From table 2 one can see that the 6868 integrated circuit from VLSI Technology reaches up to 512Mbit/s, which is not sufficient to support  
15 some high end ATM applications. Furthermore, it cryptanalysis on DES proved that it is weaker than some recent private key cryptographic algorithms like IDEA. Few hardware implementations of IDEA or its predecessors were reported in the literature. For example, an ASIC that  
20 implements the PES algorithm, which originated IDEA, has reached up to 55 Mbits/s at 25 MHz.

#### DETAILED DESCRIPTION

##### IDEA cryptographic algorithm

The first form of the IDEA algorithm, was  
25 created by " Xuejia Lai and James Massey " in 1990 (US05214703 patent) and was called PES (Proposed Encryption Standard). In 1991, the algorithm was strengthened and was called IPES (Improved Proposed Standard Encryption). In 1992 IPES was called IDEA (International Data Encryption  
30 Algorithm), and is actually considered by many specialists

WO 01/17152

3

PCT/BR99/00076

in the field of cryptography as the strongest existing symmetrical algorithm.

IDEA is a symmetric, block-oriented cryptographic algorithm, which uses 128-bit keys (thus making it practically immune to brute-force attacks) and 64-bit plaintext blocks. IDEA is build upon a basic function, which is iterated multiple times. As shown in Figure 1 the basic function is iterated eight times. The first iteration operates on the input 64-bit plaintext block and the successive iterations operate on the 64-bit block obtained from the previous iteration. After the last iteration, a final transformation step produces the 64-bit ciphertext block.

Figure 1 shows the structure of the basic function. It involves three simple operations: bitwise exclusive-or, addition modulo  $2^{16}$  (addition, ignoring the "overflow") and multiplication modulo  $2^{16} + 1$  (multiplication, ignoring the "overflow"). For each iteration, the 64-bit input block is divided into four 16-bit sub-blocks. In Figure 1, X1, X2, X3 and X4 denote the four 16-bit input sub-blocks used by the each iteration. The 64-bit block produced by each iteration is also constituted by four 16-bit sub-blocks. In Figure 1, Y1(i), Y2(i), Y3(i) and Y4(i) denote the four sub-blocks resulting from the each iteration. The 128-bit key is divided into 52 16-bit sub-keys (sub-key generation is discussed ahead). Six sub-keys are used in each iteration and four sub-keys are used in the final transformation. In Figure 1, Z1(i), Z2(i), Z3(i), Z4(i), Z5(i) and Z6(i) denote the six sub-keys used in each iteration. The operations performed in the each iteration are:

WO 01/17152

4

PCT/BR99/00076

1. Multiply sub-block  $X1(i)$  by sub-key  $Z1(i)$
2. Add sub-block  $X2(i)$  and sub-key  $Z2(i)$
3. Add sub-block  $X3(i)$  and sub-key  $Z3(i)$
- 5 4. Multiply sub-block  $X4(i)$  by sub-key  $Z4(i)$
5. XOR the results of (1) and (3)
6. XOR the results of (2) and (4)
7. Multiply the result of (5) by sub-key  $Z5(i)$
8. Add the results of (6) and (7)
- 10 9. Multiply the result of (8) by sub-key  $Z6(i)$
10. Add the results of (7) and (9)
11. XOR the results of (1) and (9)
12. XOR the results of (3) and (9)
13. XOR the results of (2) and (10)
- 15 14. XOR the results of (4) and (10)

The outputs of the iteration are the four sub-blocks produced by steps (11) to (14). The two inner sub-blocks from steps (12) and (13),  $Y2(i)$  to  $Y3(i)$ , are swapped, except for the last iteration.

- 20 Figure 1 shows the structure of the final transformation. In this figure,  $Z1(9)$  to  $Z4(9)$  denote the four 16-bit sub-keys and  $Y1$  to  $Y4$  denote the four 16-bit sub-blocks of the 64-bit ciphertext block. The operations performed in the final transformation are:

- 25 15. Multiply sub-block  $X1$  by sub-key  $Z1(9)$  to obtain  $Y1$
16. Add sub-block  $X2$  and sub-key  $Z2(9)$  to obtain  $Y2$
17. Add sub-block  $X3$  and sub-key  $Z3(9)$  to obtain  $Y3$
18. Multiply sub-block  $X4$  by sub-key  $Z4(9)$  to obtain  $Y4$

- The encryption and decryption sub-keys are
- 30 generated from the single 128-bit key. Encryption sub-keys are generated as follows. Initially, the 128-bit key is

WO 01/17152

5

PCT/BR99/00076

divided into eight 16-bit sub-keys. Six of these sub-keys, Z1(1) to Z6(1), are used in the first iteration. The two remaining sub-keys, Z1(2) and Z2(2), are for the second iteration. The original 128-bit key is then rotated left by 5 25 bits and the resulting key is again divided into eight 16-bit sub-keys. Four sub-keys, Z3(2) to Z6(2), are grouped with Z1(2) and Z2(2) and destined to the second iteration. The other four sub-keys, Z1(3) to Z4(3), are to be used in the third iteration. Next, the key is again rotated left by 10 25 bits, divided into eight 16-bit sub-keys and these sub-keys are grouped properly. This process is repeated each of the sub-keys for the eight iterations and for the final transformation have been generated. Decryption sub-keys are calculated as either the additive or the multiplicative 15 inverses of the encryption keys.

As stated, the main goal in designing HiPCrypto is to obtain a device which would meet the performance requirements of applications in current and future high-speed data networks. This was achieved by 20 including parallel execution techniques into the design of HiPCrypto's architecture. There are two opportunities for exploiting parallelism in the IDEA algorithm: in the execution of its basic function and in the iterations of this function.

25 Examining the data flow shown in Figure 1, one can identify groups of operations that are data independent. In each group, one operation does not use the results produced by other operations in the group. The sets of independent operations are: the multiply and add 30 operations in steps (1) to (4); the exclusive-or operations in steps (5) and (6); and the exclusive-or operations in

WO 01/17152

6

PCT/BR99/00076

steps (11) to (14). These independent operations can be performed simultaneously, provided the architecture incorporates multiple functional units dedicated to the execution of each of them.

5 By including multiple functional units in the architecture, we are making use of spatial parallelism. Temporal parallelism can also be employed in the execution of the basic function, by overlapping in time the operations upon distinct plaintext blocks. In this way,  
10 multiple blocks can be encrypted (or decrypted) simultaneously, instead of sequentially. This temporal parallelism was implemented with the pipeline shown in Figure 2.

Stage 1 contains two add and two multiply  
15 units that perform in parallel the independent operations in steps (1) to (4) of the algorithm.

Stage 2 contains two exclusive-or units to execute the operations in steps (5) and (6) in parallel.

Stages 3, 4, 5 and 6 contain a single add or  
20 multiply unit and they execute, respectively, the operations in steps (7), (8), (9) and (10) of the algorithm.

Stage 7 has four exclusive-or units to execute steps (11) to (14) in parallel.

25 The last stage has two add units and two multiply units and performs the algorithm's final transformation (see Figure 2). This stage will be referred to as the output stage.

In Figure 2, one can notice the inclusion of  
30 between stages of the pipeline. These queues temporarily hold data forwarded between non-adjacent stages. For



WO 01/17152

7

PCT/BR99/00076

instance, stage 7 operates on sub-blocks from stages 1 and 5 (see Figure 1).

A sub-block from stage 1 arrives five cycles before the corresponding sub-block from stage 5, and during this time interval it remains in one of the queues connecting stages 1 and 7. When the sub-block from stage 5 is available, the sub-block in the front of the queue is dequeued and paired with the sub-block from stage 5. A queue is needed along the shortest path (in number of stages) between two non-neighbor stages. The size of each queue is indicated in figure 2.

The final aspect in HiPCrypto's architecture concerns the generation and storage of the sub-keys. To generate the encryption sub-keys, it would be necessary a circuitry for the rotation and sub-division of the 128-key. Moreover, the generation of the decryption sub-keys would require an arithmetic unit for the calculation of additive and multiplicative inverses. The inclusion of this additional hardware would only be reasonable if the key changes very frequently, say, every few blocks. But that is not the common case in a private-key cryptosystem: typically, the key shared by a group of partners is changed in a long term basis (days or weeks, for example). For this reason, only sub-key storage is provided. Sub-keys are generated externally by the host system, and then downloaded into the chip.

#### Architecture of HiPCrypto

The HiPCrypto architecture, Figure 3, executes a complete iteration of the algorithm. This architecture is composed of six 16-bit multipliers, six

WO 01/17152

8

PCT/BR99/00076

16-bit adders and six 16-bit exclusive-or, memories for sub-key storage, buffers, tri-states and a control unit.

The operations contained in each stage of the pipeline, will be executed in an only machine cycle and since there are 7 pipeline stages, it will cipher (resp. decipher) 7 64 bits blocks for each execution of the algorithm.

The HIPCrypto was designed to offer four kinds of configurations, ie, 1, 2, 4 or 8 integrates in series (table 3).

Each pipeline segment is executed in one clock cycle. For one chip configuration, seven 64 bits blocks are processed each 56 (7 x 8) machine cycles. For 2 chips seven 64 bits blocks are processed each 28 (7 x 4) machine. For 4 chips configuration seven 64 bits blocks are processed each 14 (7 x 2) machine cycles. For 8 chips configuration seven 64 bits blocks are processed each 7 (7 x 1) machine cycles, that is to say, one 64 bits block for each machine cycle.

The proposed HIPCrypto's structure can be adapted to different uses. The adequate compromise between throughput and cost can be obtained by selecting the number of chips operating in series.

The signals used for selecting the chip configurations were divided in two groups: three signals that will define the configuration cch <2:0> and three signals that will define the position of the chip into the chain pos <2:0>. Tables 4 and 5 show respectively the configurations and the possible positions.

The sub-keys are stored in 4 RAMs according to Figures 3 and 4.

WO 01/17152

9

PCT/BR99/00076

For sub-keys  $Z1(i)$ ,  $Z2(i)$ ,  $Z3(i)$  and  $Z4(i)$ , a 128 bits x 8 memory is used. The first 64 bits of each memory position, least significant bits, store the cipher sub-keys (positions 0 to 63) and the last 64 bits, most significant bits (positions 64 to 127), store the decipher sub-keys. The selection to execute the algorithm in cipher or decipher mode is made through the bus selection (see Figures 3 and 4).

For sub-keys  $Z5(i)$  and  $Z6(i)$ , two 32 bits x 8 RAMs are used, where the 16 least significant bits (0 to 15), store the cipher sub-keys  $Z5(i)$  and  $Z6(i)$ , and the 16 bits most significant store the decipher sub-keys.

For the sub-keys  $Z1(9)$ ,  $Z2(9)$ ,  $Z3(9)$  and  $Z4(9)$ , a 64 bits x 2 memory is used.

#### 15 Control Unit

The control unit (see Figure 3) is the operational block that controls the operation of the architecture. This unit together with some extra circuits is responsible for the generation of the control signals. The main functions of this unit are described in the following.

The control unit selects ciphering and deciphering modes, i.e. selecting the cipher and decipher sub-keys respectively in each embedded memory.

25 The control unit also allows the correct initialization, feeding and synchronization of the pipeline stages by generating all enables and reset signals for each internal block.

The output stage will only be used by the last chip in each configuration. This selection is also

WO 01/17152

10

PCT/BR99/00076

performed by the control unit through the selected configuration for each chip.

HIPCrypto performance

Table 7 shows some examples of the  
5 performance of HIPCrypto implemented in a two metal layer  
0,7 micron CMOS technology.

WO 01/17152

11

PCT/BR99/00076

CLAIMS

1. A METHOD FOR THE HARDWARE IMPLEMENTATION  
OF THE IDEA CRYPTOGRAPHIC ALGORITHM - HIPCrypto, patented  
in the USA under the no. US05214703, that makes use of a  
5 seven stages pipeline to be implemented as a synchronous  
circuit, that will be referred as micro-pipeline, coupled  
to an output stage as described in figure 2; so that each  
stage of the pipeline supplies partial results for the  
following stage and receives partial results from the  
10 previous stage at each clock pulse of the synchronous  
circuit; so that there exists a feedback from stage number  
7 to stage number 1, controlled by the digital control unit  
so that, for each of 16 rounds for ciphering a 64 bits  
block, the first stage of the pipeline is fed with partial  
15 results from the output of the seventh pipeline stage and  
that the pipeline is fed with a new block when the  
ciphering process is completed; and the sub-keys used in  
the data ciphering and deciphering processes, in agreement  
with the definition of IDEA the algorithm, is stored in  
20 four dedicated memory units.

2. A METHOD FOR THE HARDWARE IMPLEMENTATION  
OF THE IDEA CRYPTOGRAPHIC ALGORITHM - HIPCrypto, in  
agreement with claim 1 in which the operations 1, 2, 3 and  
4 of the description of the IDEA cryptographic algorithm is  
25 executed by two 16 bits multiplier units and two 16 bits  
adder units; and these units compose pipeline stage number  
as described in figure 2; so that this stage receives,  
either a new 64 bits block from data input or a partial  
result from the seventh stage and the ciphering or  
30 deciphering sub-keys corresponding to this stage as  
described in the figures 2 and 3; so that the inputs and

WO 01/17152

12

PCT/BR99/00076

outputs of this stage are connected to input and output registers respectively.

3. A METHOD FOR THE HARDWARE IMPLEMENTATION  
5 OF THE IDEA CRYPTOGRAPHIC ALGORITHM - HIPCrypto, in  
agreement with claim 1 in which the operations 5 and 6 of  
the description of the IDEA cryptographic algorithm are  
executed by two 16 bits exclusive-or units; and these units  
compose stage number two of the pipeline as described in  
10 the figure 2; so that this stage receives partial results  
from the first stage as described in the figures 2 and 3;  
so that the inputs and outputs of this stage are connected  
to input and output registers respectively.

4. A METHOD FOR THE HARDWARE IMPLEMENTATION  
15 OF THE IDEA CRYPTOGRAPHIC ALGORITHM - HIPCrypto, in  
agreement with claim 1 in which the operation 7 of the  
description of the IDEA cryptographic algorithm is executed  
by a 16 bits multiplier unit; and this unit composes stage  
number three of the pipeline as described in the figure 2;  
20 so that this stage receives partial results from the  
previous stage and ciphering and deciphering sub-keys  
corresponding to this stage as described in figures 2 and  
3; and that the inputs and outputs of this stage are  
connected to input and output registers respectively.

25 5. A METHOD FOR THE HARDWARE IMPLEMENTATION  
OF THE IDEA CRYPTOGRAPHIC ALGORITHM - HIPCrypto, in  
agreement with claim 1 in which the operation 8 of the  
description of the IDEA cryptographic algorithm is executed  
by a 16 bits adder unit; and this unit composes stage  
30 number four of the pipeline as described in the figure 2;  
so that this stage receives partial results of the stages 2

WO 01/17152

13

PCT/BR99/00076

and 3 as described in the figure 2; and that the inputs and outputs of this stage are connected to input and output registers respectively.

6. A METHOD FOR THE HARDWARE IMPLEMENTATION  
5 OF THE IDEA CRYPTOGRAPHIC ALGORITHM - HIPCrypto, in agreement with claim1 in which the operation 9 of the description of the IDEA cryptographic algorithm is executed by a 16 bits multiplier unit; and this unit composes stage  
10 number five of the pipeline as described in figure 2; so that this stage receives partial results from the previous stage and ciphering and deciphering sub-keys corresponding to this stage as described in the figures 2 and 3; and that the inputs and outputs of this stage are connected to input and output registers respectively.

15 7. A METHOD FOR THE HARDWARE IMPLEMENTATION OF THE IDEA CRYPTOGRAPHIC ALGORITHM - HIPCrypto, in agreement with claim1 in which the operation 10 of the description of the IDEA cryptographic algorithm is executed by a 16 bits adder unit; and this unit composes stage  
20 number six of the pipeline as described in the figure 2; so that this stage receives partial results of stages 3 and 5 as described in figure 2; and that the inputs and outputs of this stage are connected to input and output registers respectively.

25 8. A METHOD FOR THE HARDWARE IMPLEMENTATION OF THE IDEA CRYPTOGRAPHIC ALGORITHM - HIPCrypto, in agreement with claim1 in which the operations 11, 12, 13 and 14 of the description of the IDEA cryptographic algorithm are executed by four 16 bits exclusive-or units;  
30 and these units compose stage number seven of the pipeline as described in figure 2; so that this stage receives

WO 01/17152

14

PCT/BR99/00076

partial results from stages 1, 5 and 6 as described in the figure 2; and that the inputs and outputs of this stage are connected to input and output registers respectively.

9. A METHOD FOR THE HARDWARE IMPLEMENTATION OF THE IDEA CRYPTOGRAPHIC ALGORITHM - HIPCrypto, in agreement with claim1 in which the operations 15, 16, 17 and 18 of the description of the IDEA cryptographic algorithm are executed by two 16 bits multiplier units and for two 16 bits adder units; and these units compose the output stage of the pipeline as described in figure 2; so that this stage receives partial results from stage 7 of the pipeline and ciphering and deciphering sub-keys corresponding to the output stage as described in figures 2 and 3; and that the inputs and outputs of this stage are connected to input and output registers respectively.

10. A METHOD FOR THE HARDWARE IMPLEMENTATION OF THE IDEA CRYPTOGRAPHIC ALGORITHM - HIPCrypto, in agreement with claim1, in which the sub-keys used in ciphering and deciphering process are stored in four dedicated memories according to figure 4 as follows: ciphering sub-keys  $Z1(i)$ ,  $Z2(i)$ ,  $Z3(i)$  and  $Z4(i)$  ( $i$  from 1 to 8) and deciphering sub-keys  $Z1(i)$ ,  $Z2(i)$ ,  $Z3(i)$  and  $Z4(i)$  ( $i$  from 1 to 8) stored in a 128 bits x 8 memory; ciphering sub-keys  $Z5(i)$  ( $i$  from 1 to 8) and deciphering sub-keys  $Z5(i)$  ( $i$  from 1 to 8) stored in the first 32 bits x 8 memory; ciphering sub-keys  $Z6(i)$  ( $i$  from 1 to 8) and deciphering sub-keys  $Z6(i)$  ( $i$  from 1 to 8) stored in the second 32 bits x 8 memory; ciphering sub-keys  $Z1(9)$ ,  $Z2(9)$ ,  $Z3(9)$  and  $Z4(9)$  and deciphering sub-keys  $Z1(9)$ ,  $Z2(9)$ ,  $Z3(9)$  and  $Z4(9)$  stored in the 64 bits x 2 memory.



WO 01/17152

15

PCT/BR99/00076

11. A METHOD FOR THE HARDWARE IMPLEMENTATION  
OF THE IDEA CRYPTOGRAPHIC ALGORITHM - HIPCrypto, in  
agreement with claims 1 and 2, in which a second pipeline  
level, denominated macro-pipeline, allows the concatenation  
5 of 2, 4 or 8 circuits operating with a micro-pipeline of  
seven stages as indicated in the table 3.

12. A METHOD FOR THE HARDWARE IMPLEMENTATION  
OF THE IDEA CRYPTOGRAPHIC ALGORITHM - HIPCrypto, in  
agreement with claims 1 and 2, in which " first-in first-  
10 out "(FIFO) memories are used in order to synchronize the  
data provenient from non adjacent stages in the following  
way: a 64 bits x 5 positions FIFO connecting stages 1 and  
7, a 16 bits x 2 positions FIFO connecting stages 3 and 6,  
a 16 bits x 1 position FIFO connecting stages 2 and 4, a 16  
15 bits x 1 position FIFO connecting stages 5 and 7, as  
described in the figure 3.

WO 01/17152

1/8

PCT/BR99/00076

## DRAWINGS

Table 1

DES Algorithm velocity implemented in  
different plataforms.

Plataforms	Frequency (MHz)	Troughput (cipher)
8088	4,7	23,68 Kbps
68000	7,6	57,6Kbps
80286	6	70,4 Kbps
68020	16	224 Kbps
68030	16	249,6 Kbps
80386	25	320 Kbps
68030	50	640 Kbps
68040	25	1,024 Mbps
68040	40	1,472 Mbps
80486	66	2,752 Mbps
HP900/887	125	10,816 Mbps
Sun ELC		1,664 Mbps
HyperSparc		2,048 Mbps
RS6000-350		3,392 Mbps
Sparc 10/52		5,376 Mbps
DEC Alpha 4000/610		9,856 Mbps

WO 01/17152

2/8

PCT/BR99/00076

Table 2

## Commercial integrates of DES Algorithm

Fabricant	Integrate	Fabrication year	Frequency	Troughput
AMD	Am9518	1981	3 MHz	10,4 Mbps
AMD	Am9568	?	4 MHz	12 Mbps
AMD	AmZ8068	1982	4 MHz	13,6 Mbps
AT&T	T7000A	1985	?	15.2 Mbps
CE-infosys	SuperCrypt	1992	20 MHz	100 Mbps
	CE99C003			
CE-infosys	SuperCrypt	1994	30 MHz	160 Mbps
	CE99C003A			
Cryptech	Cry12C102	1989	20 MHz	22,4 Mbps
Newbridge	CA20C03A	1991	25 MHz	30,8 Mbps
Newbridge	CA20C03W	1992	8 MHz	5,12 Mbps
Newbridge	CA95C68/18/09	1993	33 MHz	117,4 Mbps
Pijnenburg	PCC100	?	?	20 Mbps
Semaphore	Roadrunner284	?	40 Mhz	284 Mbps
Communications				
VLSI	VM007	1993	32 MHz	160 Mbps
technology				
VLSI	VM009	1993	33 MHz	112 Mbps
technology				
VLSI	6868	1995	32 MHz	512 Mbps
technology				

Table 3

Configuration	Iteration numbers for configuration
1 integrate	8 iterations
2 integrates	4 iterations in each integrate
4 integrates	2 iterations in each integrate
8 integrates	1 iteration in each integrate

WO 01/17152

3/8

PCT/BR99/00076

Table 4:

ch2	ch1	ch0	Configuration
			1 integrate.
			2 series-connected integrates.
			4 series-connected integrates.
			8 series-connected integrates.

Table 5:

pos 2	pos 1	pos0	Integrate position.
0	0	0	First position
0	0	1	Second position
0	1	0	Third position
0	1	1	Fourth position
1	0	0	Fifth position
1	0	1	Sixth position
1	1	0	Seventh position
1	1	1	Eighth position

Table 6:

Configuration			Position		
cch2	cch1	cch0	pos2	pos1	pos0
0	0	0	0	0	0
0	0	1	0	0	0
			0	0	1
0	1	0	0	0	0
			0	0	1
			0	1	0
			0	1	1
1	0	0	0	0	0
			0	0	1
			0	1	0
			0	1	1
			1	0	0
			1	0	1
			1	1	0
			1	1	1

WO 01/17152

4/8

PCT/BR99/00076

Table 7:

Macro-pipeline Configurations	Performance Clock frequency: (59 MHz)
1 integrate	424 Mbps
2 integrates	848 Mbps
4 integrates	1,7 Gbps
8 integrates	3,4 Gbps

WO 01/17152

5/8

PCT/BR99/00076

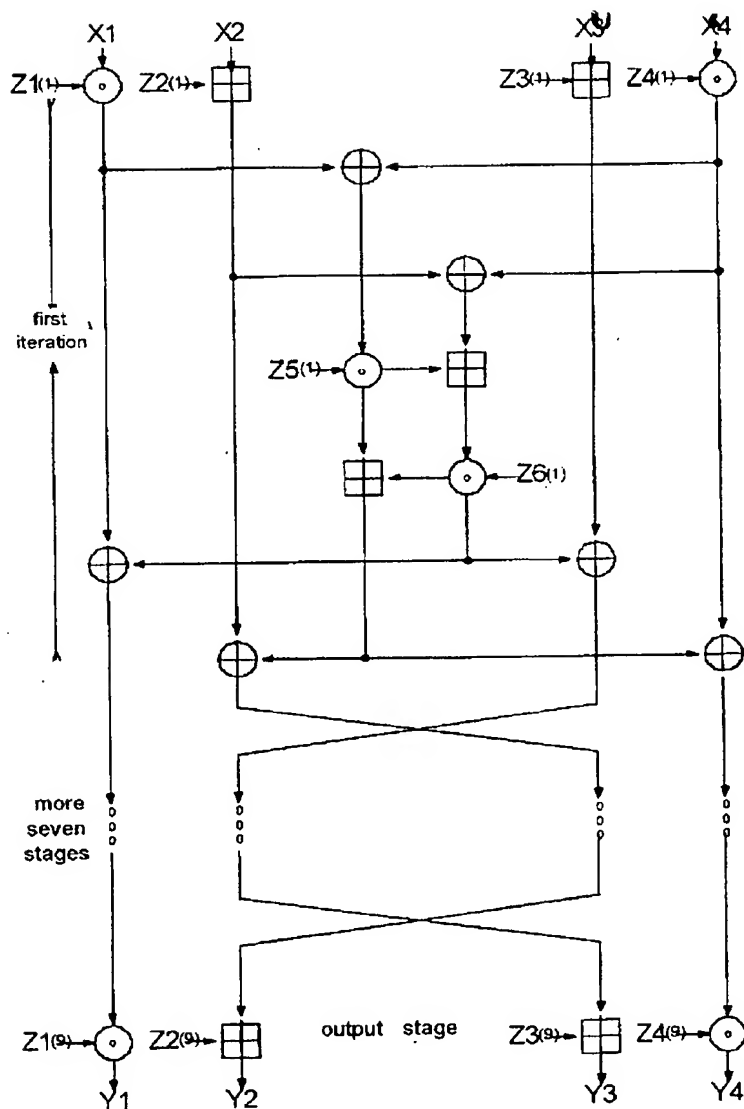


Figure 1

WO 01/17152

6/8

PCT/BR99/00076


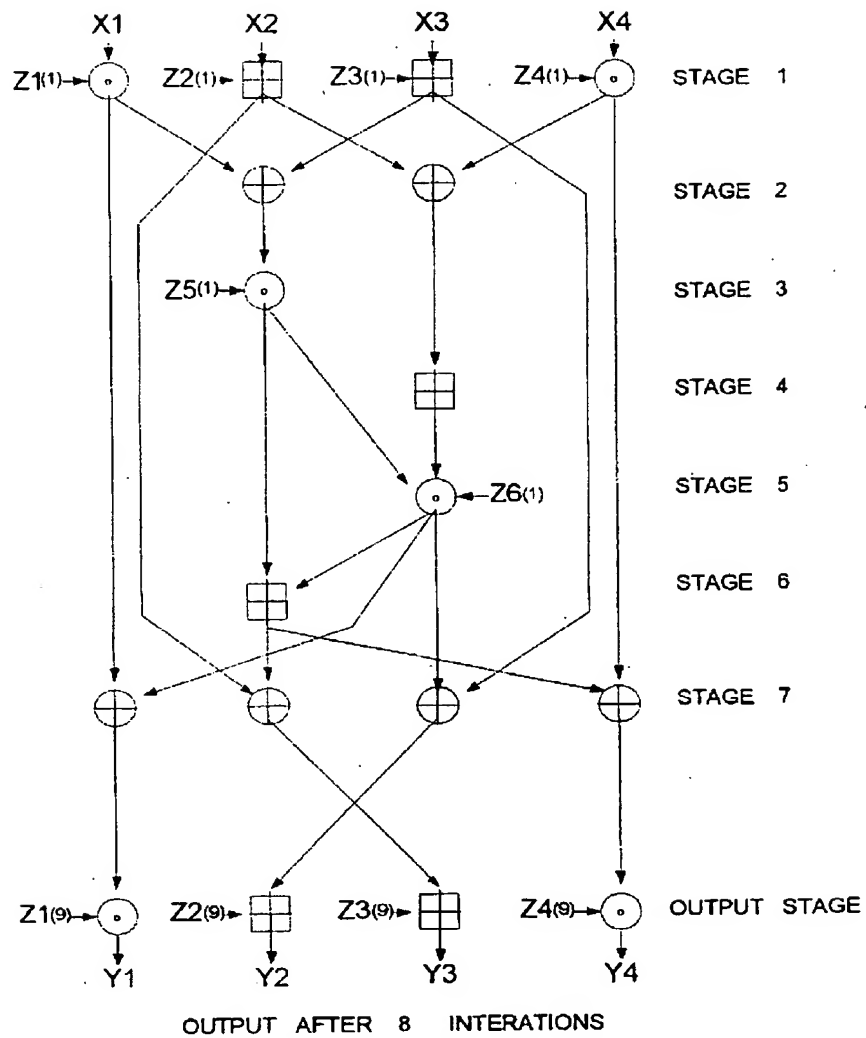


Figura 2

WO 01/17152

PCT/BR99/00076

7/8

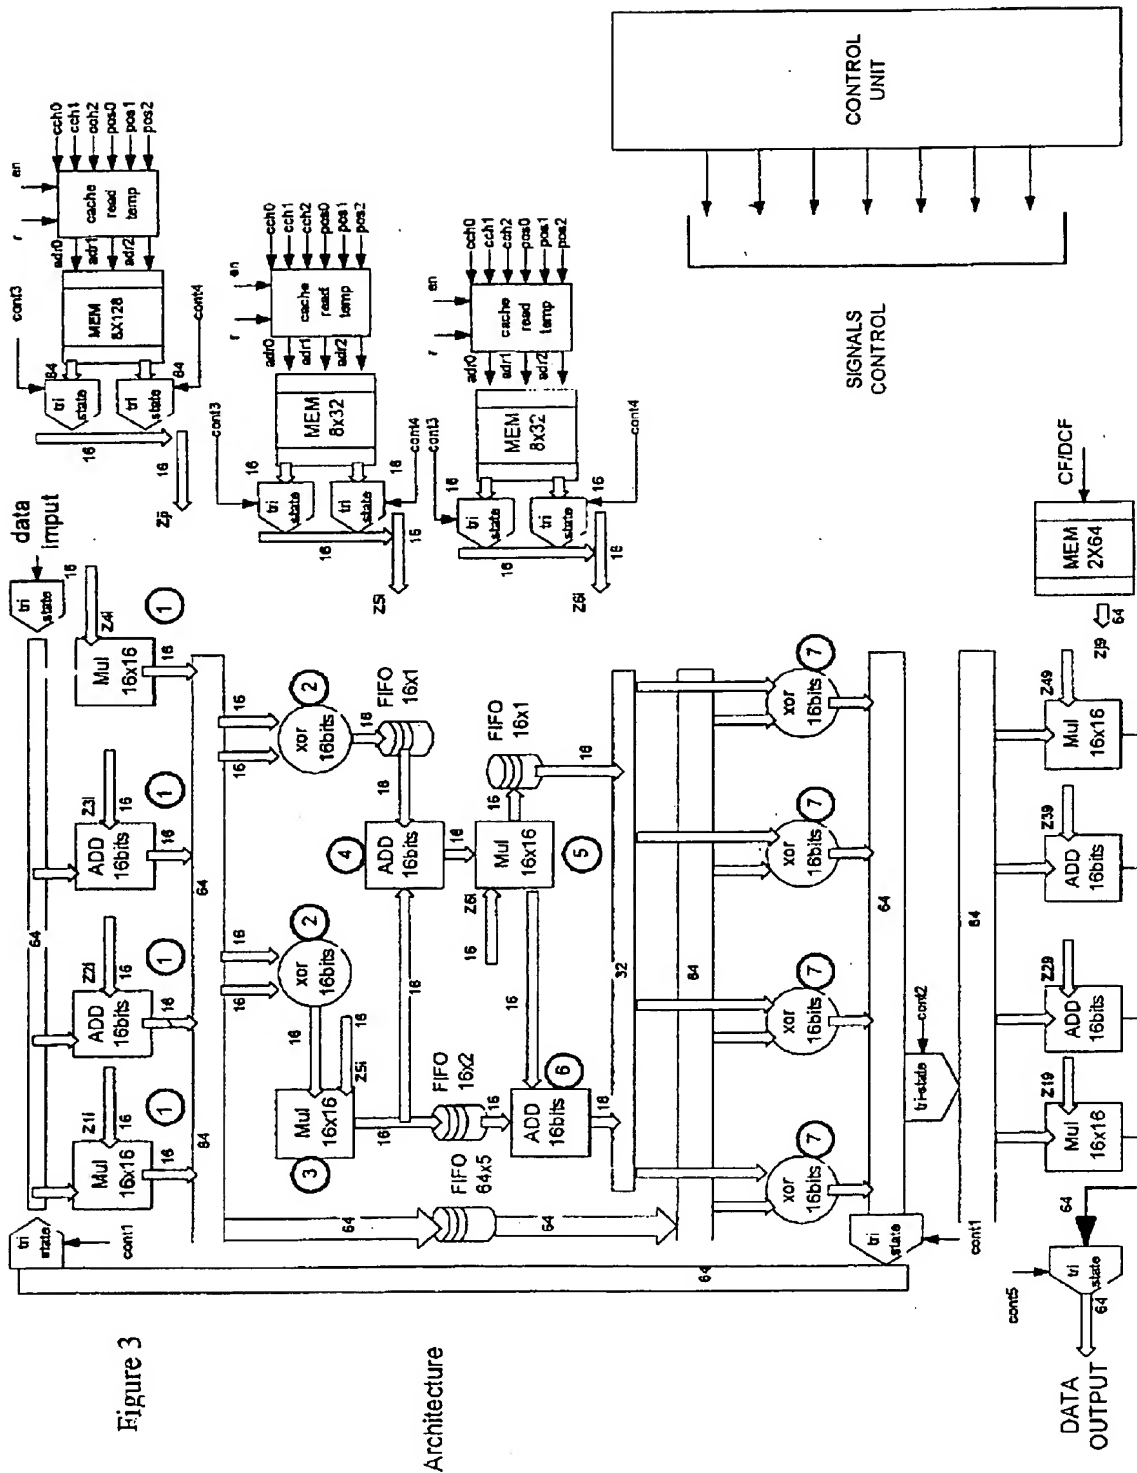



WO 01/17152

8/8

PCT/BR99/00076

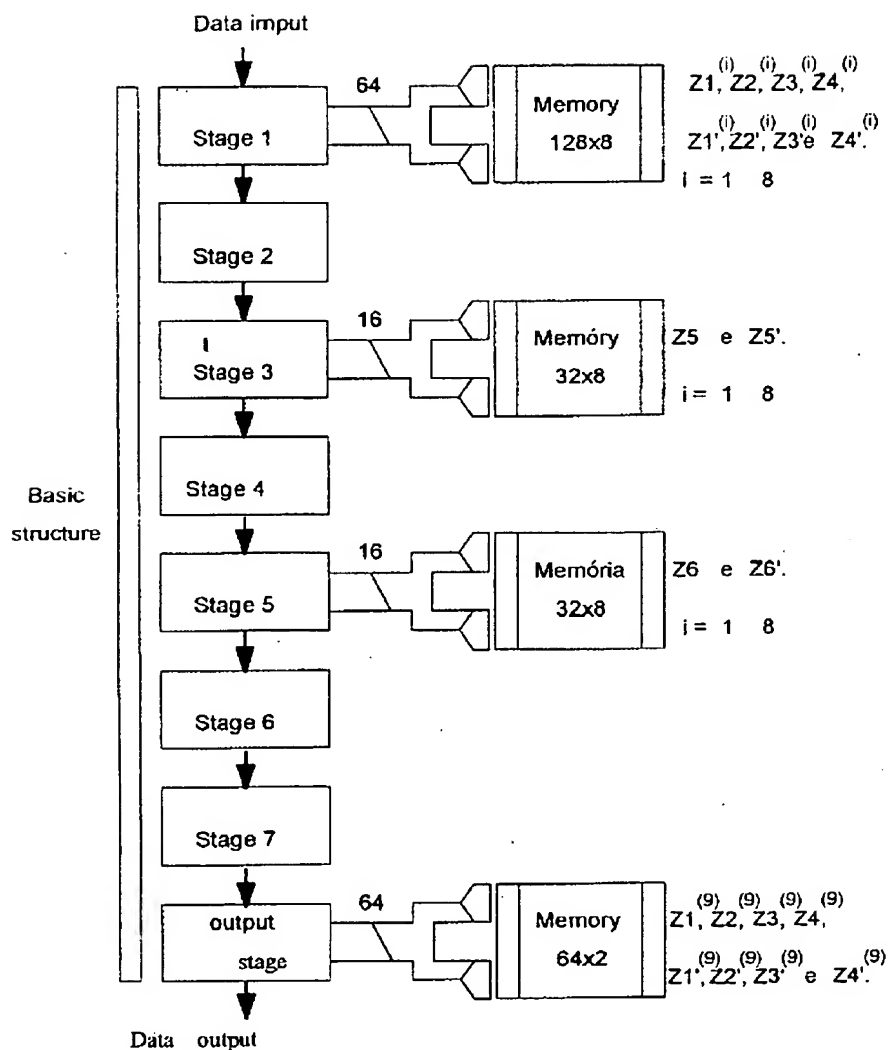


Figure 4